


D.E. AYER INDUSTRIAL SERVICE
 INC
 P.O BOX 1679
 DOVER, NH 03821-1679

Estimate

Date	Estimate #
8/28/2017	81

Name / Address
Town of Barrington P.O Box 660 Barrington, NH 03825

Project

Description	Qty	Cost	Total
Regrade floor gravel allowance	93	16.00	1,488.00
Labor and Machine time	1,800	1.00	1,800.00
6mil clear poly	250	1.00	250.00
110 sheets of 6 by 6 2.9/2.9 5' by 10'	790.62	1.00	790.62
1400' 2.5" slab boster upper	660.1	1.00	660.10
150 sheets foamular 250/25psi 2" by 4' by8'	5,830.5	1.00	5,830.50
labor	2,500	1.00	2,500.00
60" aco k200 8" wide grates are class e 135,000lbs	6,979	1.00	6,979.00
Labor	1,200	1.00	1,200.00
Labor and Materials install 3/4 " tubing	11,000	1.00	11,000.00
90yards 4000psi concrete pumped and finished sealed and cut	20,000	1.00	20,000.00
Optional Boiler \$13,500.00			
THIS IS QUOTE FOR NEW HIGHWAY GARAGE FLOOR FLOOR LEVEL IS TO FOUNDATION LEVEL AND PAVEMENT NO CUTTING QUOTED. SLAB IS TO INSIDE MEASUREMENTS.			
ALL INSURANCE WILL BE PROVIDED BEFORE START OF WORK OR WITHIN 5 DAYS AWARDED BID			
THANKS DANIEL EATER president 8/28/17 3:45pm			
			
Total			\$52,498.22

K-COB Plumbing & Heating, LLC

24 Hall Road
 Barrington, NH 03825
 603-617-6387
 Master License # 4899


Estimate

Date	Estimate #
8/28/2017	91

Name / Address
Town Of Barrington Barrington NH 03825

Project

Description	Qty	Cost	Total
Install new boiler to include: HTP 199,00 BTU Eft Propane wall hung boiler New fittings and pipe as needed Gas piping and venting to exterior of building. All controls and low voltage wiring as needed All proper pumps, thermostats and connection for radiant heat. Manifold will have two extra zones on them if needed for modine heaters		13,500.00	13,500.00
All work comes with a 1 year guarantee and equipment is by manufacturer warranty.		0.00	0.00
Thank you, Casey O'Brien		Total	\$13,500.00

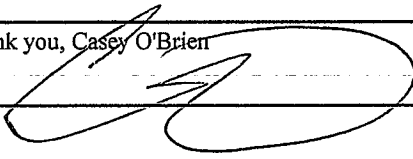

Customer Signature _____

K-COB Plumbing & Heating, LLC

24 Hall Road
 Barrington, NH 03825
 603-617-6387
 Master License # 4899

Estimate


Date	Estimate #
8/28/2017	90

Name / Address
Town Of Barrington Barrington NH 03825

Project

Description	Qty	Cost	Total
Install radiant heat tubing under slab prior to being pored in a 60 x 80 area. Use 3/4 inch heat tubing per spec of RFQ. Use ties to tie tubing to wire mesh supplied by others. This price quote is only for tubing, manifold on wall and labor only. All other material is supplied by company poring slab or GC.		11,000.00	11,000.00

Thank you / Casey O'Brien	Total	\$11,000.00
---------------------------	--------------	-------------

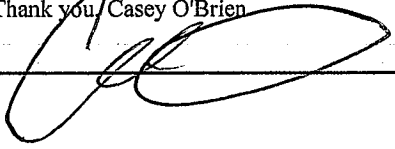

Customer Signature _____

GROEN CONSTRUCTION, INC.

John Scruton
Town Administrator
Barrington, NH 03825
August 28, 2017

Re:
Barrington Public Highway Garage Floor


Dear John,

Please find listed below our bid for a concrete slab in the existing Highway Garage. Our pricing is based on the information as detailed in the "Town of Barrington, Invitation to Submit Proposals (RFP), 2017 New Highway Garage Floor".

Lump sum price	\$ 66,201.00
• Alternate #1: Propane fired boiler for radiant heat	\$ 16,325.00

If you have any questions please call Groen Construction at 603-332-6551 and ask for me or Fenton.

We appreciate the opportunity to serve you on this project.

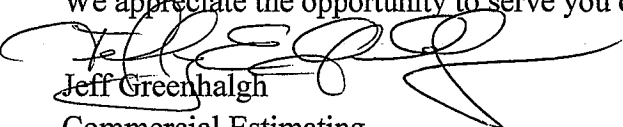
Jeff Greenhalgh
Commercial Estimating

Phone: (603) 332-6551

120 Washington Street, Suite #302, Rochester, NH 03839

On Time

•

In Budget

•

To Your Satisfaction